GateKeeper® GPU 15 Gas Purifiers

Superior purity control

Entegris' GateKeeper® GPU gas purifiers were designed to improve purity consistency, lifetime and final purity. Leveraging its expertise in material science, Entegris has developed a new generation of purification products that deliver unsurpassed value and performance. The model 15 is designed for peak flow rates up to 500 sccm.




FEATURES & BENEFITS

Process control and protection	Purity control to ppt levels	
	Low pressure drop across the purifier	
	CE certified to the Pressure Equipment Directive (PED) and manufactured in an ISO® 9001:2000 facility	
Cost effective	Regenerable – eliminates disposal issues and costs	
	Long lifetime – improved cost of ownership	
Safe and simple to use	Use ambient temperature purification – no heat or power required to operate	
	Insensitive to orientation (horizontal/vertical)	

PERFORMANCE DATA

Pressure Drop vs. Gas Flow Rate*

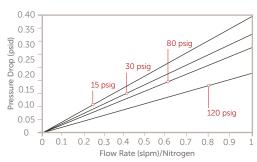

*The flow rate displayed on this graph may exceed maximum flow rate specification of the purifier model referenced in this data sheet. Please refer to maximum flow rate in the specifications section of this data sheet.

Note: Pressure drop may vary depending on media type.

SPECIFICATIONS

Materials of construction (housing)	316L stainless steel, electropolished		
Particle filtration type	Wafergard® – 316L stainless steel membrane		
Particle retention	Up to 6 LRV* for particles larger than 0.003 μm		
Filtration removal rating	≥0.003 µm		
Operating temperature	0-65°C (32-149°F)		
Operating pressure	1.01 barg-137.8 barg (0 psig-2000 psig)		
Maximum flow rate	500 sccm		
Fitting size and type	½" gasket seal**"		
Fitting configuration	Male-to-male		
Leak rating	1×10^{-9} atm cc/sec		
Dimensions	84 mm (3.31") L × Ø25.4 mm (1")		
Approximate weight	0.2 kg (0.4 lb)		

^{*}Referenced as most penetration particle size.

AVAILABLE MEDIA

Media	Gases purified	Contaminants removed	Outlet purity	Nominal flow rate ³
IX	N ₂ , Noble gases	H ₂ O, O ₂ , CO, CO ₂ , H ₂	<100 ppt in Ar and N ₂	0.28 slpm
	Freon ¹ 13, 14, 23, 41, 116, 218	H ₂ O, O ₂		
	CDA, N ₂ , Noble gases,	Condensable organics (as Toluene)	<1 ppt	0.13 slpm ⁴
	J	Non-condensable organics ² (as Butane)	<5 ppt	
		Refractory compounds (as HMDSO)	<1 ppt	
WX	CDA, H ₂ , N ₂ , Noble gases, CO ₂ , NH ₃ , AsH ₃ , PH ₃ , GeH ₄ , SiH ₄	H ₂ O	<100 ppt in N ₂	1.47 slpm ⁵
			<12 ppb in NH ₃	

 $^{^{1}}$ Removal of $\mbox{H}_{\rm 2}\mbox{O}$ and $\mbox{O}_{\rm 2}$ only.

^{**}Also referred to as VCR® or face seal.

² Consult Entegris with specific non-condensable contaminants.


 $^{^3}$ With a 1 ppm H_2O impurity inlet challenge

⁴ With a 1 ppm Toluene impurity inlet challenge over 1 year

 $^{^{\}rm 5}$ Lifetime will exceed 1 year at its maximum flow rate

ORDERING INFORMATION

GateKeeper GPU 15 Gas Purifiers: part number

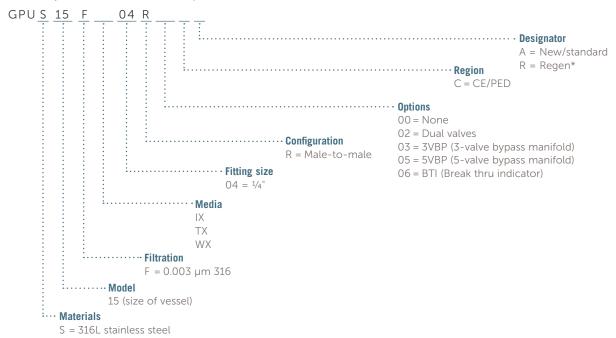

^{*}Contact Entegris to determine if the purifier is designed for regeneration.

FOR MORE INFORMATION

Please call your Regional Customer Service Center today to learn what Entegris can do for you. Visit **entegris.com** and select the Contact Us link to find the customer service center nearest you.

TERMS AND CONDITIONS OF SALE

All purchases are subject to Entegris' Terms and Conditions of Sale. To view and print this information, visit **entegris.com** and select the Terms ϑ Conditions link in the footer.



Corporate Headquarters 129 Concord Road Billerica, MA 01821 USA Customer Service
Tel +1 952 556 4181
Fax +1 952 556 8022
Toll Free 800 394 4083

Entegris®, the Entegris Rings Design $^{\infty}$, Pure Advantage $^{\infty}$, and other product names are trademarks of Entegris, Inc. as listed on entegris.com/trademarks. All third-party product names, logos, and company names are trademarks or registered trademarks of their respective owners. Use of them does not imply any affiliation, sponsorship, or endorsement by the trademark owner.