# GateKeeper® GPU 17M 12R/16R Gas Purifiers

Superior purity control

Entegris' GateKeeper® GPU series of gas purifiers were designed to improve purity consistency, lifetime and final purity. Leveraging its expertise in material science, Entegris has developed a new generation of purification products that deliver unsurpassed value and performance. Models 17M-12R and 17M-16R are designed for peak flow rates up to 2000 and 2500 slpm, respectively.




## **FEATURES & BENEFITS**

Process control and protection	Purity control to ppt levels  Low pressure drop across the purifier		
	Low pressure drop across the purmer		
	CE certified to the Pressure Equipment Directive (PED) and manufactured in an ISO® 9001:2000 facility		
Cost effective	Regenerable – eliminates disposal issues and costs		
	Long lifetime – improved cost of ownership		
Safe and simple to use	Use ambient temperature purification — no heat or power required to operate		
	Insensitive to orientation (horizontal/vertical)		

#### PERFORMANCE DATA

## Pressure Drop vs. Gas Flow Rate

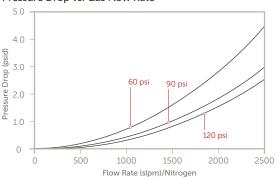



## **SPECIFICATIONS**

	17M-12R	17M-16R	
Materials of construction (housing)	316L stainless steel, electropolished		
Particle filtration type	316L stainless steel membrane		
Filtration removal rating	≥20 µm		
Operating temperature	0 – 65°C (32 – 149°F)		
Fitting size and type	³/₄" (12R) gasket seal*	1" (16R) gasket seal*	
Fitting configuration	Male-to-male		
Operating pressure	1.01 barg – 25.5 barg (0 psig – 370 psig)		
Maximum flow rate	2000 slpm	2500 slpm	
Leak rating	1 10 <sup>-9</sup> atm cc/sec		
Dimensions	1084 mm (42.66") L × Ø152.4 mm (6")	1090 mm (42.92") L × Ø152.4 mm (6")	
Approximate weight	33 kg (73 lb)	35 kg (77 lb)	

<sup>\*</sup> Also referred to as VCR® or face seal.

## **AVAILABLE MEDIA**

Media	Gases purified	Contaminants removed	Outlet purity	Nominal flow rate
DZ CO <sub>2</sub>	Volatile acids	<1 ppt	445 slpm	
		Volatile bases	<1 ppt	
		Refractories	<1 ppt	
		Condensable organics	<1 ppt	
		H <sub>2</sub> O	<1 ppb	
		O <sub>2</sub>	<200 ppt	
EX H <sub>2</sub> , N <sub>2</sub> , Noble gases, H <sub>2</sub> /N <sub>2</sub> , H <sub>2</sub> /Noble gases	H <sub>2</sub> O, CO <sub>2</sub>	<100 ppt in $H_2$ and $N_2$	730 slpm	
	H <sub>2</sub> /N <sub>2</sub> , H <sub>2</sub> /Noble gases	$O_2$	<250 ppt in $H_2$ and $N_2$	
		CO	<1 ppb in H <sub>2</sub> and N <sub>2</sub>	
	CxHy (45–100 amu)	<10 ppt		
		CxHy (>100 amu)	<1 ppt	
		Refractory compounds (as HMDSO)	<1 ppt	

# AVAILABLE MEDIA (CONTINUED)

Media	Gases purified	Contaminants removed	Outlet purity	Nominal flow rate <sup>3</sup>
НХ	H <sub>2</sub> , N <sub>2</sub> , Noble gases, H <sub>2</sub> /N <sub>2</sub> , H <sub>2</sub> /Noble gases	H <sub>2</sub> O, O <sub>2</sub> , CO, CO <sub>2</sub>	<100 ppt in $H_2$ and $N_2$	730 slpm
IX	N <sub>2</sub> , Noble gases	H <sub>2</sub> O, O <sub>2</sub> , CO, CO <sub>2</sub> , H <sub>2</sub>	<100 ppt in Ar and $N_2$	365 slpm
	Freon <sup>1</sup> 13, 14, 23, 41, 116, 218	H <sub>2</sub> O, O <sub>2</sub>		
NX	O <sub>2</sub>	CO <sub>2</sub>	<1 ppb	1009 slpm
		H <sub>2</sub> O	<1 ppb	
OP	CDA, N₂, Noble gases	H <sub>2</sub> O	<100 ppt in N <sub>2</sub>	765 slpm
	_	Condensable organics (as Toluene)	<1 ppt	
		Non-condensable organics <sup>2</sup> (as Butane)	<5 ppt	
		Refractory compounds (as HMDSO)	<1 ppt	
		Volatile acids (as SO <sub>2</sub> )	<1 ppt	
		Volatile bases (as NH <sub>3</sub> )	<10 ppt	
SX	NH <sub>3</sub>	H <sub>2</sub> O	<2 ppb in NH <sub>3</sub>	329 slpm
		CO <sub>2</sub>	<1 ppb	
		$O_2$	<1 ppb	
		Hydrocarbons	<1 ppt	
	CDA, N <sub>2</sub> , Noble gases, CO <sub>2</sub> , NH <sub>3</sub>	Condensable organics (as Toluene)	<1 ppt	1020 slpm⁴
002,1113		Non-condensable organics <sup>2</sup> (as Butane)	<5 ppt	
		Refractory compounds (as HMDSO)	<1 ppt	
WX	CDA, H <sub>2</sub> , N <sub>2</sub> , Noble gases, CO <sub>2</sub> , NH <sub>3</sub> , AsH <sub>3</sub> , PH <sub>3</sub> ,	H <sub>2</sub> O	<100 ppt in N <sub>2</sub>	3070 slpm⁵
	GeH <sub>4</sub> , SiH <sub>4</sub>		<12 ppb in NH <sub>3</sub>	

 $<sup>^1</sup>$  Removal of  $\rm H_2O$  and  $\rm O_2$  only.  $^2$  Consult Entegris with specific non-condensable contaminants.


<sup>&</sup>lt;sup>3</sup> With a 1 ppm H₂O impurity inlet challenge

<sup>&</sup>lt;sup>4</sup> With a 1 ppm Toluene impurity inlet challenge over 1 year

<sup>&</sup>lt;sup>5</sup> Lifetime will exceed 1 year at its maximum flow rate

### ORDERING INFORMATION

## GateKeeper 17M 12R/16R Gas Purifiers: part number

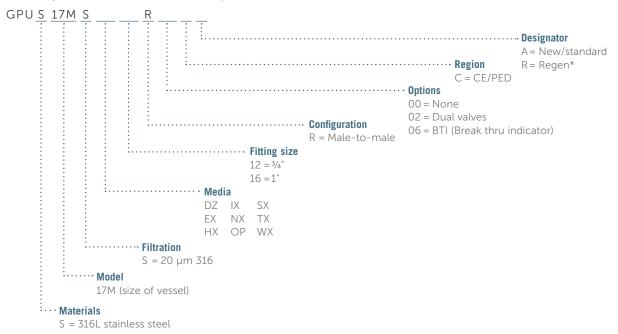

<sup>\*</sup>Contact Entegris to determine if the purifier is designed for regeneration.

## FOR MORE INFORMATION

Please call your Regional Customer Service Center today to learn what Entegris can do for you. Visit **entegris.com** and select the Contact Us link to find the customer service center nearest you.

## TERMS AND CONDITIONS OF SALE

All purchases are subject to Entegris' Terms and Conditions of Sale. To view and print this information, visit **entegris.com** and select the Terms & Conditions link in the footer.



Corporate Headquarters 129 Concord Road Billerica, MA 01821 USA Customer Service
Tel +1 952 556 4181
Fax +1 952 556 8022
Toll Free 800 394 4083

Entegris®, the Entegris Rings Design™, Pure Advantage™, and other product names are trademarks of Entegris, Inc. as listed on entegris.com/trademarks. All third-party product names, logos, and company names are trademarks or registered trademarks of their respective owners. Use of them does not imply any affiliation, sponsorship, or endorsement by the trademark owner.

©2016-2017 Entegris, Inc. | All rights reserved. | Printed in the USA | 4521-8057ENT-1117